


LUMIOS MkIII



**LUMIOS MkIII**  
Luminance Photometer for Tunnels

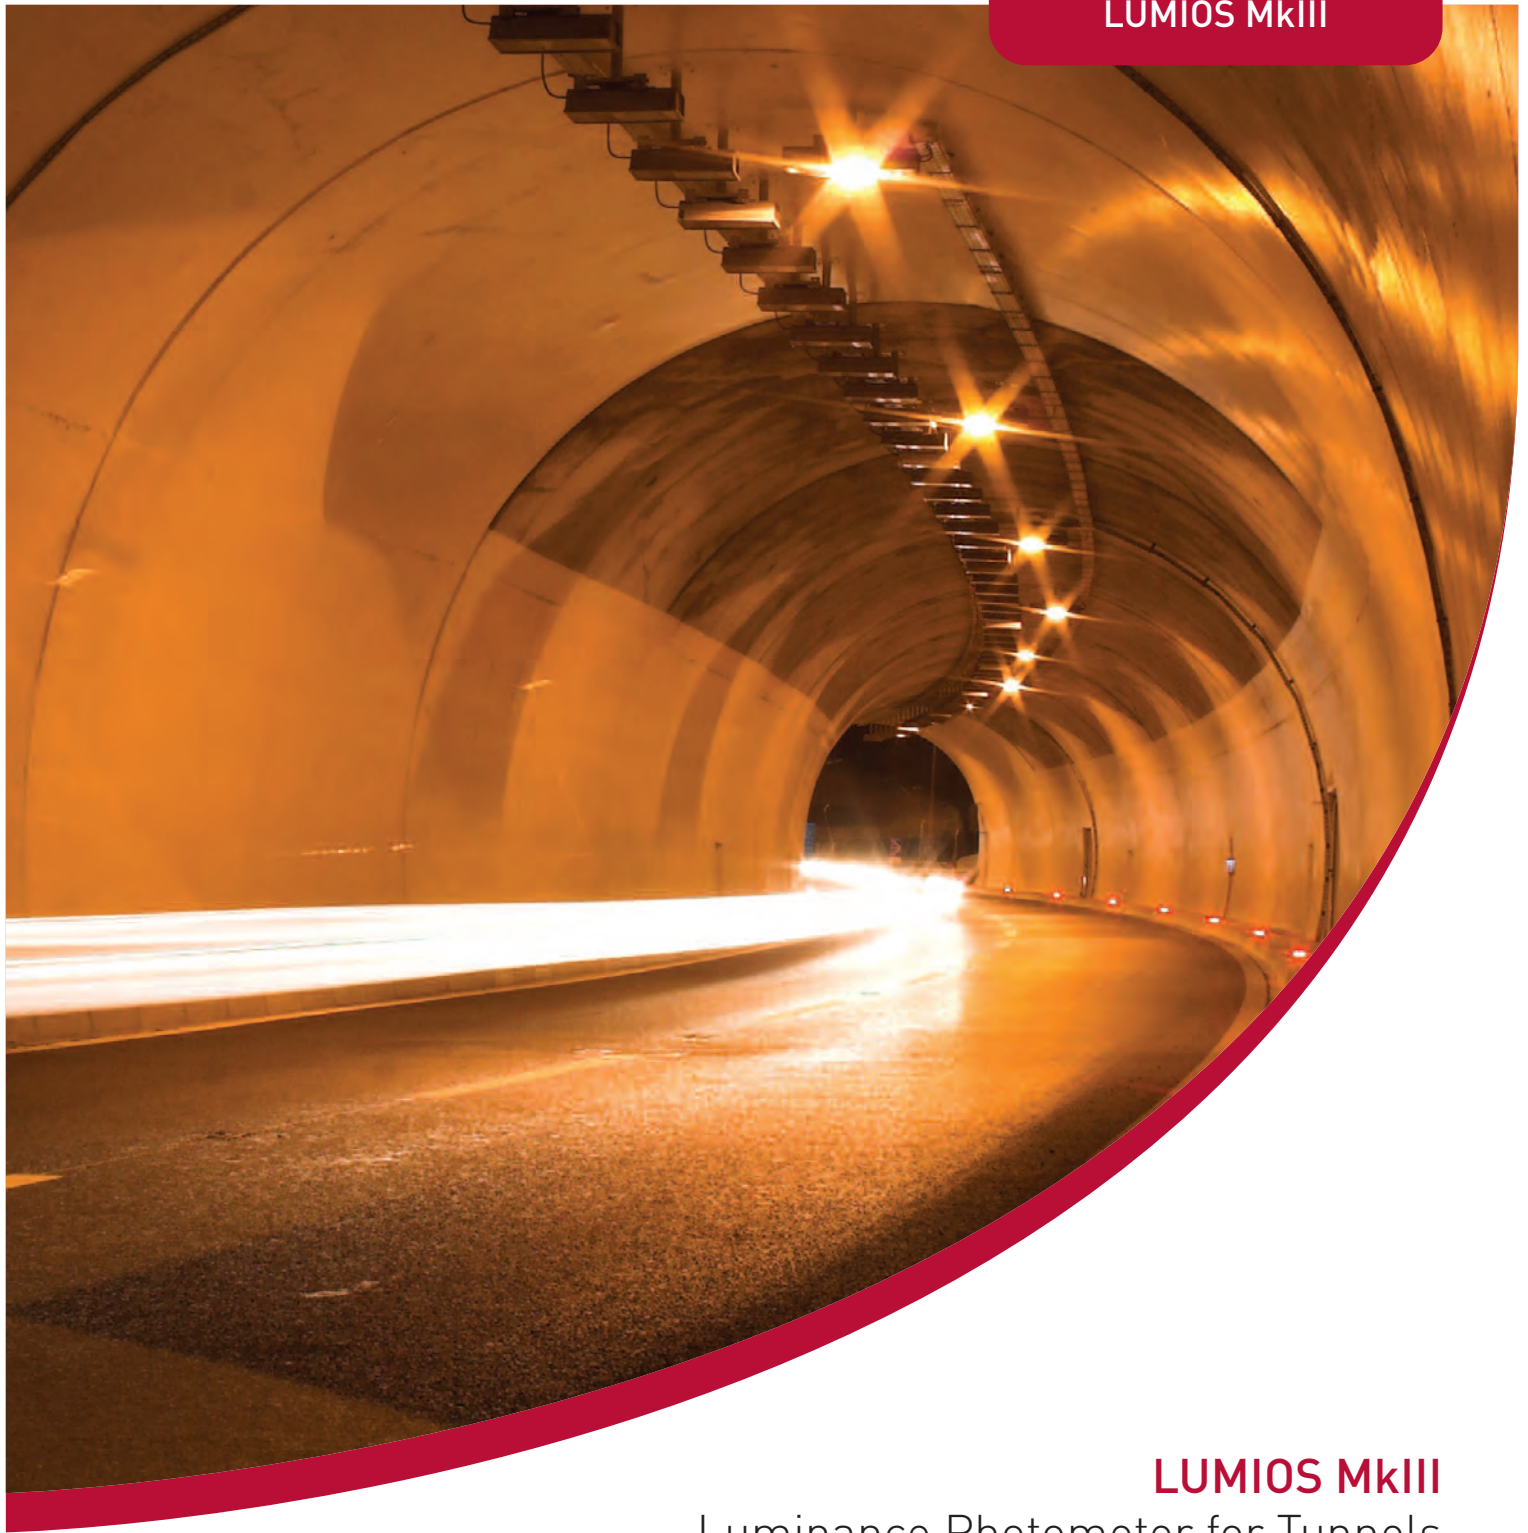

**TUNNEL SENSORS**

# LUMIOS MkIII

## Luminance Photometer For Tunnels

### FEATURES

- Measurement of luminance, or brightness, created by natural light at the tunnel portals
- CIE Approved measurement of L20
- Variable viewing angle within a range of 10 to 40° (factory preset)
- Silicon photo diode,  $V_{\lambda}$  filtered for spectral response close to that of the average human eye
- Rugged 316 stainless steel construction with IP66 protection rating
- Heated window and enclosure
- Self-contained intelligent analyser for direct connection to host controller
- Suitable for measurement of luminance within the tunnel



### BENEFITS


- Designed specifically for monitoring tunnel portals
- Rugged design to withstand extremes of weather conditions
- Simple installation and mounting
- Optional wash-wipe facility to minimise maintenance requirements
- Flexible integration options

### APPLICATIONS

The LUMIOS measures the level of luminance, or brightness, created by natural light at the tunnel entrance / exit to ensure that the visual perception of drivers is maintained, both day and night, by avoiding sudden variations in lighting levels and potential “black hole effect” when entering and exiting a tunnel. The LUMIOS can also be used for the measurement of luminance within the tunnel.

### OPERATION

The LUMIOS uses a specially designed highly light-sensitive photocell, filtered to provide a spectral response close to that of the average human eye, to react to changes in light levels at the entrance and exit to, as well as within, the tunnel environment. This reaction is virtually instantaneous. The light receptor measures the average luminance within a fixed viewing angle that can be set during manufacture within a range 10 to 40°. The standard instrument has an acceptance angle of 20°, (as recommended by Commission Internationale de l’Eclairage, (C.I.E.), publication 88, 1990). The luminance measurement range is 0 - 10,000 cd/m<sup>2</sup>, which can be scaled to suit customer requirements.

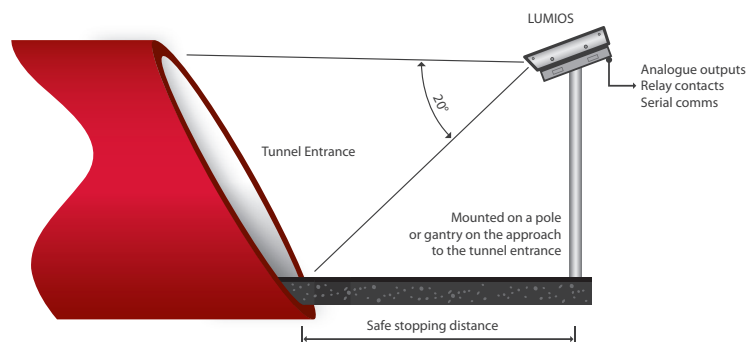

### SYSTEM COMPONENTS

- LUMIOS MkIII sensor
- PC based utility software package for set-up and control of the instrument
- Optional adjustable wall or post / pole mounting brackets
- Optional wash-wipe facility

## TECHNICAL SPECIFICATION

### MEASUREMENT PERFORMANCE

Parameter	Comment
Measuring Principle	Luminance
Detector	Silicon photo diode, $V_{\lambda}$ filtered
Viewing Angle (FWHM)	10 – 40° in 1° steps (defined at time of order) 20° (as standard)
Measurement Range	0 – 10,000 cd /m <sup>2</sup> (user configurable)
Accuracy	Better than + / - 3 %

### POWER REQUIREMENTS

Voltage	100 – 250 Vac / 50 – 60 Hz
Nominal Power Consumption	6 – 10 W (excluding wash-wipe)

### INTERFACE OPTIONS

Serial Comms	ModBus RTU via RS485 (isolated) External USB
Analogue Outputs	0 / 2 / 4 – 20 mA (isolated and scalable)
Digital Relay Contacts	2 A @ 240 Vac

### PHYSICAL

Ambient Operating Temperature	-30 – +70 °C
Ambient Operating Humidity	0 – 100 %
Ingress Protection	IP66 for external use
Regulatory Compliance	2004/108/EC (Electromagnetic Radiation) 2006/95/EC (Low Voltage)
Materials	316 Stainless steel (powder coated)
Dimensions	463 x 162 x 122 mm (without optional wiper) 463 x 162 x 184 mm (with optional wiper)
Weight	5.5 kg (without optional wiper)

## Tunnel Sensors

A network of local distributors worldwide



Africa • Americas • Asia • Europe • Middle East • Oceania

نماینده انحصاری در ایران

زیست تجهیز پویش

(سهامی خاص)



آدرس: تهران، خ مطهری، خ فجر، ک افشار، پ ۱۶، ط ۱

تلفن: ۸۸۸۲۷۷۲۳ - ۸۸۸۲۶۸۷۵ فکس: ۸۸۸۲۶۷۹۱

پست الکترونیکی: info@PooyeshEnviro.ir



**TUNNEL SENSORS**

For further information about our product range please  
call +44 (0)1280 850563 or e-mail [sales@tunnelsensors.com](mailto:sales@tunnelsensors.com)  
and a member of our team will be happy to help.

**Tunnel Sensors Limited**  
Furlong House  
Crowfield  
Brackley  
Northamptonshire  
NN13 5TW  
United Kingdom

**Telephone:** +44 (0)1280 850563  
**Facsimile:** +44 (0)1280 850568

**E-mail:** [sales@tunnelsensors.com](mailto:sales@tunnelsensors.com)  
**Visit:** [www.tunnelsensors.com](http://www.tunnelsensors.com)

